


Linea

LX-601

Passive line source speaker for music and speech, 6 × 6,5" / 4 × 1", 1000 W, 136 dB SPL max., approx. 195 × 1500 × 238 mm, mobile version

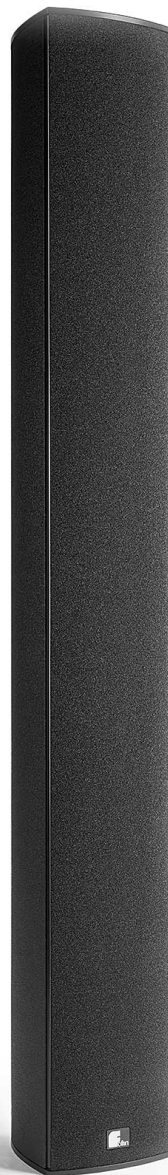

Linea LX-601

The mobile LX-601 combines and optimizes the principles of line array technology in a compact yet powerful system. It achieves first-class directivity, even dispersion and a long reach. The unit can be placed inconspicuously in the room thanks to its slim design. The loudspeaker system can be optimally combined with passive and active subwoofers of the X and Perform series and delivers best results with Fohhn DSP power amplifiers.

Main features

- 6 × 6.5" long excursion driver, 4 × 1" compression driver with Waveguide
- Nominal power rating: 1000 W
- Dispersion: 100° × 20° (H × V)
- SPL max.: 136 dB
- High feedback resistance
- Connections: 2 × Speakon
- High-quality wooden enclosure (multiplex birch) with PU coating
- Available in RAL Classic, NCS or Pantone colors on request
- Versatile mounting and flying accessories
- In order to ensure performance and operational safety, Fohhn system amplifiers including the correct speaker preset are required.

Available with the following color options



Black

Equipped with the following Fohhn technologies



Fohhn Source
Division
Waveguide



Special colors
optional



Weatherproof
execution

Technical data

Electroacoustic features

| | |
|----------------------------|--|
| acoustic design | passive hybrid line source speaker system, 2-way |
| power rating (nominal) | 1000 watts |
| power rating (program) | 2000 watts |
| power rating (peak) | 4000 watts |
| components | 6 × 6.5" long excursion chassis, attached compression chamber with phase board, 4 × 1" compression drivers on Fohhn-Waveguide with self-resetting IPC-HF protection, fully neodymium |
| sensitivity | 101 dB |
| maximum SPL | 136 dB |
| frequency range | 75 Hz – 20 kHz |
| nominal impedance | 8 ohms |
| 2-way design | yes |
| nominal dispersion (h × v) | 100° × 20° |

Features

| | |
|------------------------|--|
| enclosure | multiplex birch plywood, Aluminium |
| front design | acoustic foam, same colour as enclosure |
| protection grille | steel grille, ball impact resistant, powder-coated |
| weight | 29 kg |
| standard colours | black or white |
| handles | integrated handle on top and bottom, 1 × unscrewable handle on rear side |
| mounting points | 8 × M6 and 2 × M8 thread |
| weather protection | polyurethane coating and water-repellant speaker cone impregnation |
| connectors | 2 × NL4 Neutrik Speakon |
| dimensions (W × H × D) | approx. 195 × 1500 × 238 mm |

Optional features

| | |
|------------------|--|
| optional colours | RAL Classic / NCS / Pantone on request |
|------------------|--|

CAAD simulation data

| | |
|-----------------|-------------------------------|
| simulation data | EASE, Ulysses, Fohhn Designer |
|-----------------|-------------------------------|

power rating (nominal/program): according to IEC-60268-5 (long term/short term)

power rating (peak); maximum SPL: peak, 20 ms with bandpass filtered pink noise signal according to IEC 60268-2 at one octave above the lower limit of the frequency range

sensitivity: 2,83 V at 8 ohms (2 V at 4 ohms, 4 V at 16 ohms) at a distance of 1 m under anechoic fullspace conditions

frequency range: -10 dB under anechoic halfspace-conditions

weight: net weight without optional equipment

Intelligent Protection Circuit (IPC): voltage-controlled semiconductor circuit protecting the HF-driver against overload highly effective and with very short attack time

cut-off frequency: -10 dB under anechoic halfspace-conditions with speaker preset

heat dissipation: pink noise, 6 dB crest, 1/4 Pmax

Fohhn Audio AG
Großer Forst 15
72622 Nuertingen
Germany

Phone +49 7022 93323-0
Fax +49 7022 93324-0
www.fohhn.com
info@fohhn.com

