

NOISE[®] **INNOVISE** **DC Brushless Fan Motor**



TUBE AXIAL FAN
BLOWER FAN
CENTRIFUGAL FAN
CUSTOMIZED MOTOR ASSEMBLY

F6025-H SERIES



SPECIFICATIONS

SIZE	60×60×25 mm
TYPE	Thermal-Lock protection
HOUSING	Rib/Flange
IMPELLER	High Static Pressure
BEARING	Ball/ Sleeve
WEIGHT	63 g


AVAILABLE OPTIONS

- Tachometer output signal
- Locked rotor output signal
- PWM duty control




Custom added-value options: special lead wired, connector installations, etc.

DIMENSIONS

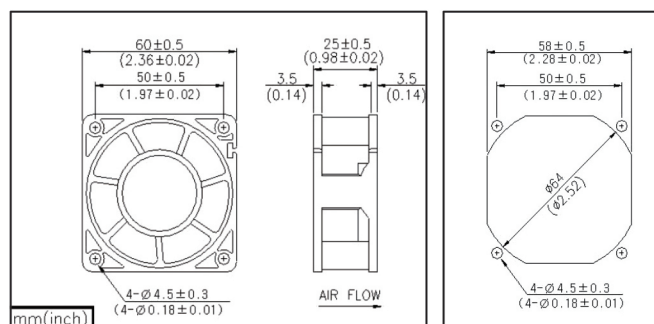

PERFORMANCE CURVE

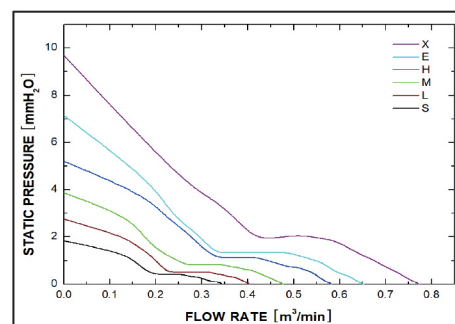

Model	Rated			Speed [RPM]	Operating Voltage [V _{DC}]	Performance (At Rated Speed)				
	Voltage [V _{DC}]	Current Max.[mA]	Power Max. [W]			Air Flow Max.		Static Pressure Max.		Noise [dBA]
						[m³/min]	[CFM]	[mmH₂O]	[inH₂O]	
F6025S12	12	75	0.90	2,400	10~14	0.35	12	1.84	0.07	21
F6025L12	12	85	1.02	3,000	10~14	0.40	14	2.75	0.11	23
F6025M12	12	95	1.14	3,600	10~14	0.48	17	3.88	0.15	26
F6025H12	12	140	1.68	4,200	10~14	0.58	20	5.20	0.20	30
F6025E12	12	230	2.76	5,000	10~14	0.65	23	7.14	0.28	34
F6025X12	12	330	3.96	5,800	10~14	0.77	27	9.69	0.38	39
F6025S24	24	40	0.96	2,400	20~28	0.35	12	1.84	0.07	21
F6025L24	24	45	1.08	3,000	20~28	0.40	14	2.75	0.11	23
F6025M24	24	55	1.32	3,600	20~28	0.48	17	3.88	0.15	26
F6025H24	24	80	1.92	4,200	20~28	0.58	20	5.20	0.20	30
F6025E24	24	125	3.00	5,000	20~28	0.65	23	7.14	0.28	34
F6025X24	24	170	4.08	5,800	20~28	0.77	27	9.69	0.38	39

※ Speed range at rated voltage is ±10% of rated speed.

**TUBE AXIAL FAN
BLOWER FAN
CENTRIFUGAL FAN
CUSTOMIZED MOTOR ASSEMBLY**



DONGYANGFAN CO.,LTD

82-26, Juyeom-ro, Namdong-gu, Incheon, Republic of Korea 21500
Tel 82-32-817-8002 **Fax** 82-32-817-4123

AGENT

DAEYA **Tel** 82-2-859-6688 **Fax** 82-2-859-8800
HANIL **Tel** 82-2-864-4433 **Fax** 82-2-864-4880

NONOISE F6025E24B 24V 0.125A 2

NONOISE F6025E24B 24V 0.125A 2

	F6025E24B
	NONOISE
	60
	60
	25
	24V
	0.125A
	2
	F6025E24B





