


Front




Back

KCQ-304B

- High quality video image with full digital video processing technology
- Individual camera titles (up to eight characters)
- Time and date display
- Individual color control (bright and contrast) for enhanced screen views
- Multi-Screen functions
- Picture-in-a-Picture(PIP) features for increased flexibility
- Auto impedance switching BNC connector at looping video output
- 2 x digital zoom with view control
- Programmable video loss alarm

DRAWING

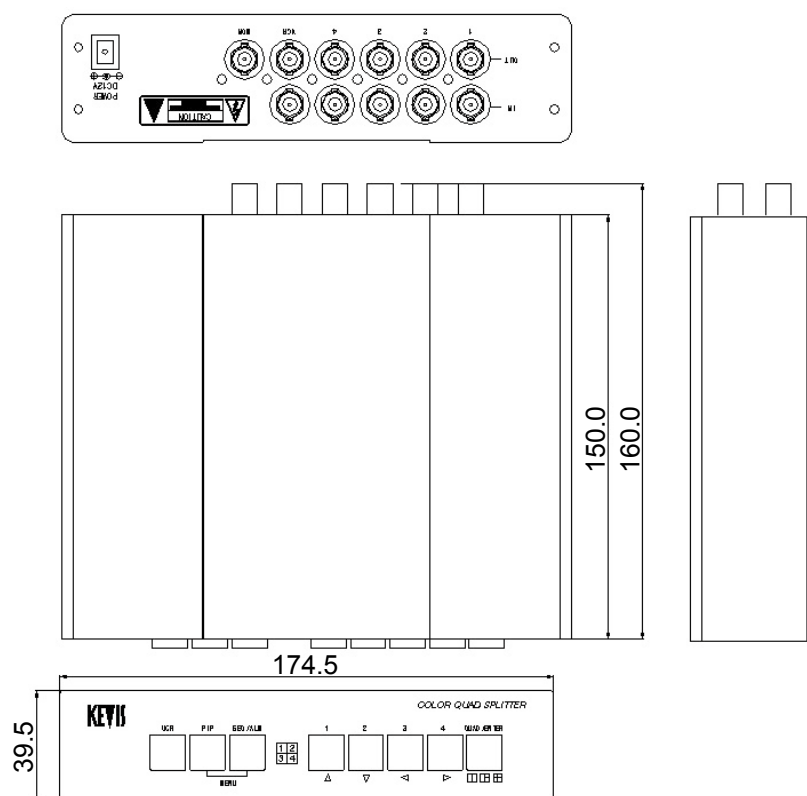

Specification

VIDEO SIGNAL	Television System	NTSC	PAL
	Refresh Rate	60 field / sec	50 field / sec
	Digital Memory	720 X 484	720 X 572
	Video Inputs	4 Cameras	
	Video Inputs Signal	1.0 Vp-p 750hms	
	Video Outputs	1 Monitor, 1 VCR	
	Video Output Signal	1.0 Vp-p 75 Ohms	
	Scale	Yes	
ELECTRICAL	Input Voltage	DC12, 1A SMPS Adaptor	
	Power Consumption	Approx, 8W	
VIDEO FEATURE	Display Format	4 screen(Quad Screen)	
	Sequencing(Dwell)	1 ~ 99 sec	
	Segment Border	White	
CONNECTORS	Video Inputs	4 BNCs	
	Monitor Output	1 BNC	
	VCR Output	1 BNC	
	VCR Input	1 BNC	
	Power Input	DC jack	
MECHANICAL	Dimension(m/m)	45(H)x180(W)x172(D)	
	Weight	670g	
ENVIRONMENTAL	Operating Temperature	0 ~ 50 degC	
	Humidity	10 ~ 90%	



KEVIS KOREA:
801-01, 104 SK Ventium, 522 Dangjung-Dong,
Gunpo-City, Kyunggi-Do, Korea 435-766
TEL : +82 31 427 9801
FAX : +82 31 427 9806