

Product Specification

SPECIFICATION FOR APPROVAL

(●) Preliminary Specification
 () Final Specification

Title	4.3" (480 X 272 X RGB) TFT- LCD
--------------	--

BUYER	
MODEL	

SUPPLIER	LG.Philips LCD CO.,Ltd.
MODEL	LB043WQ1
SUFFIX	TD01

SIGNATURE	DATE
/	_____
/	_____
/	_____

APPROVED BY	DATE
C. S. KYEONG /G. Manager	_____
REVIEWED BY	
W. C. Lee / Engineer	_____
PREPARED BY	
B. H. Kim / Engineer	_____

Product Engineering Dept.
LG. Philips LCD Co., Ltd

Product Specification**Contents**

No.	Item	Page
0	Record of Revisions	3
1	General Description	4
2	Interface Connection	6
3	Absolute Maximum Ratings	8
4	Electrical Characteristics	9
5	Optical Characteristics	14
6	Mechanical Characteristics	17
7	Color Input Data Reference	18
8	Reliability Test	19
9	Outline Dimension	20
10	Packing	21
11	Precautions	22

Product Specification

RECORD OF REVISIONS

[illegible]

Product Specification

1. General Description


1-1. Description

The LB043WQ1-TD01 is a **White LED Backlight Assembly** Product of TFT LCD without any extra system. This module utilizes amorphous silicon thin film transistors. A 4.3" active matrix liquid crystal display allows 16M colors to be displayed.

The applications are portable DVD, Car Navigation, multimedia applications and others AV system.

1-2. Features

- High Brightness & contrast ratio
- Wide Viewing Angle
- WQVGA(480X272 pixels) resolution
- 8 Bits color depth
- T-Con & Power Block Integrated In D-IC
- Low power consumption
- Touch screen panel (Film to Glass type)
- DE (Data Enable) & SYNC mode – DE, Vsync, Hsync, DOTCLK

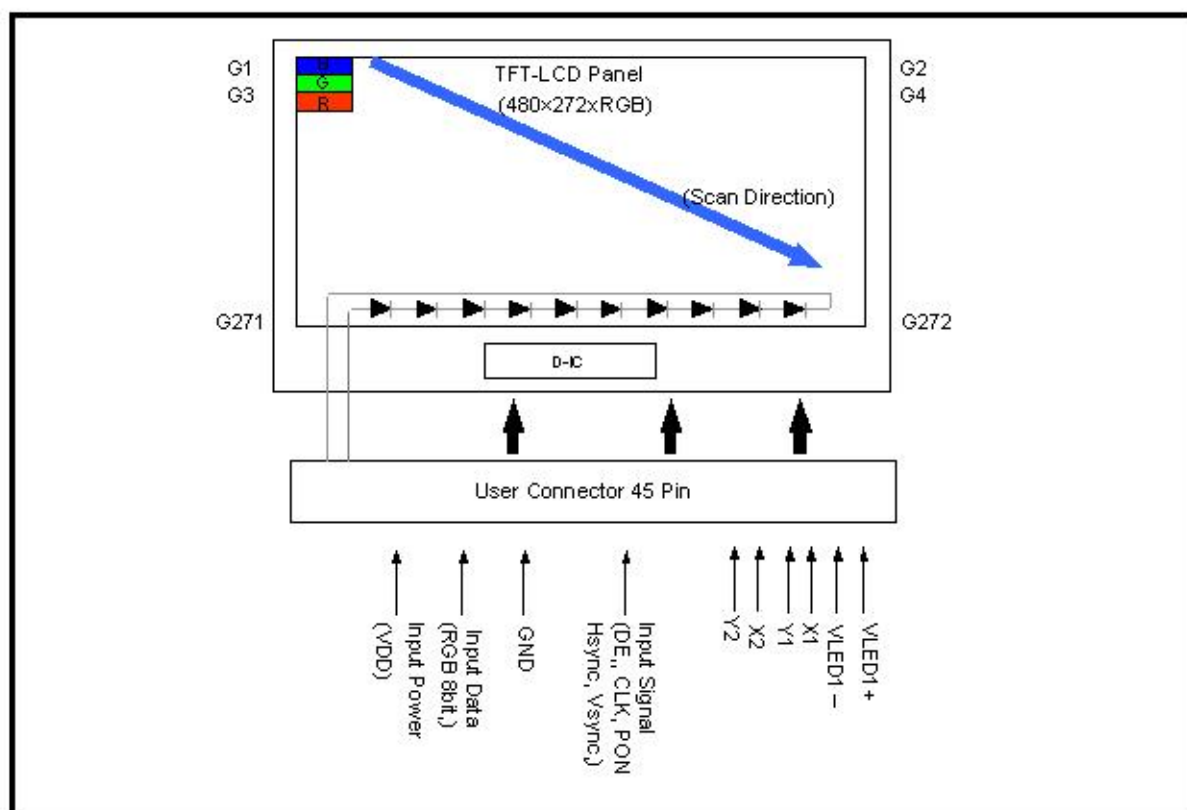

Product Specification

1-3. General Specification

PARAMETER	SPECIFICATION	REMARK
Active Screen Size	4.3 inches	Diagonal
Outline Dimension	105.5[H] x 67.2[V] x 4.0[D]	With TSP [mm]
Active Area	95.04[H] x 53.856[V]	[mm]
Number of dots	480[H] x 272 x RGB[V]	-
Dot Pitch	0.198 x 0.198	[mm]
Display Mode	TN / Transmissive / Normally White	-
Viewing Direction	6 o'clock	12 o'clock (good viewing)
Color Filter Array	RGB Vertical Stripe	-
Signal Interface	Digital RGB	-
Weight	70	[g]
Backlight	10LEDs	-

Product Specification

2. Interface Connections

This LCD employs Three interface connection for the operation of module. The pin configuration for the connector is shown in the table below.

2-1. Main LCM Connector

(Connector Type: 45Pin 0.5mm pitch,

Mating Connector: Hirose FH12 Series)

Pin	Symbol	Description	I/O	Remark
1	VSS	GROUND	I	
2	VSS	GROUND	I	
3	VDD	DIGITAL VOLTAGE	I	Note [2-1]
4	VDD	DIGITAL VOLTAGE	I	
5	R0	RED DATA(LSB)	I	
6	R1	RED DATA	I	
7	R2	RED DATA	I	
8	R3	RED DATA	I	
9	R4	RED DATA	I	
10	R5	RED DATA	I	
11	R6	RED DATA	I	
12	R7	RED DATA(MSB)	I	
13	G0	GREEN DATA(LSB)	I	
14	G1	GREEN DATA	I	
15	G2	GREEN DATA	I	
16	G3	GREEN DATA	I	
17	G4	GREEN DATA	I	
18	G5	GREEN DATA	I	
19	G6	GREEN DATA	I	
20	G7	GREEN DATA(MSB)	I	
21	B0	BLUE DATA(LSB)	I	
22	B1	BLUE DATA	I	
23	B2	BLUE DATA	I	
24	B3	BLUE DATA	I	
25	B4	BLUE DATA	I	
26	B5	BLUE DATA	I	
27	B6	BLUE DATA	I	
28	B7	BLUE DATA(MSB)	I	
29	VSS	GROUND	I	
30	DCLK	DATA CLOCK	I	

Product Specification

Pin	Symbol	Description	I/O	Remark
31	PON	DISPLAY ON/OFF	I	
32	HSYNC	HORIZONTAL SYNC SIGNAL	I	
33	VSNC	VERTICAL SYNC SIGNAL	I	
34	DE	DATA ENABLE	I	
35	PWRSEL	VDD Power Select	I	High: 3.3V Low : 2.5V
36	VSS	Ground	I	
37	Y2	Top-electrode-differential analog	I	
38	X2	Left-electrode-differential analog	I	
39	Y1	Bottom-electrode-differential analog	I	
40	X1	Right-electrode-differential analog	I	
41	VSS	Ground	I	
42	LED -	LED Cathode	I	
43	LED +	LED Anode	I	
44	NC	No Connect	-	
45	NC	No Connect	-	

[Note 2-1] VDD Voltage could be changed by PWRSEL.
PWRSEL is High → VDD Voltage must be 3.3V
PWRSEL is Low → VDD Voltage must be 2.5V

Product Specification

3. Absolute Maximum Ratings

If used the beyond absolute maximum ratings, this device can permanently be damaged.
 It is strongly recommended to use this device at a condition for normal operation.

Parameter	Symbol	CONDITION	Min	Max	Unit	Notes
Power Supply Voltage	VDD	T _a =25℃	-0.3	3.5	V	
LED Forward Current	I _f	T _a =25℃	-	30	mA	[Note 3-1]
Operating Temperature	T _{op}	-	-20	70	℃	[Note3-2]
Storage Temperature	T _{st}	-	-30	80	℃	[Note 3-2]
Humidity	H _{OP}	-	5	95	%RH	[Note 3-2]

[Note 3-1] Applies for each LED individually

[Note 3-2] Humidity: 95% RH Max, no condensation > 40 ℃

Product Specification

4. Electrical Characteristics

4-1. Recommended Operating Conditions

◆ TFT-LCD Panel Driving Section

($T_a = 25^{\circ}C$)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	REMARK
Digital Input Voltage	VDD	2.3	2.5	2.8	V	PWRSEL=0
		2.9	3.3	3.5	V	PWRSEL=1
Frame Frequency	f _{FRAME}		60		Hz	
Dot Clock	f _{clk}		9.0	15.0	MHz	
Logic Input Voltage	V _{IH}	0.7*VDD	-	VDD	V	
	V _{IL}	0	-	0.3*VDD	V	
Logic Output Voltage	V _{OH}	VDD-0.4	-	VDD	V	
	V _{OL}	0	-	0.4	V	
Power Consumption	W		700	-	mW	Black Pattern

4-2. Backlight Unit

($T_a = 25^{\circ}C$)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	REMARK
LED forward Current	I _f	-	20	-	mA	[Note4-1]
Power Consumption	P _{BL}	-	650	-	mW	

[Note4-1] The permissible forward current of LED vary with environmental temperature.

4-3. Touch Screen Panel

($T_a = 25^{\circ}C$)


PARAMETER	MIN.	TYP.	MAX.	UNIT	REMARK
Linearity	1.5	-	1.5	%	Analog X & Y Directions
Terminal Resistance	200	-	900	Ω	X-axis
	200	-	900	Ω	Y-axis
Insulation Resistance	25	-	-	MΩ	DC 25V
Voltage	-	-	7	V	DC
Chattering	-	-	10	ms	
Transparency	-	80	-	%	

Product Specification
4-3. Timing Characteristics of input signals
 $(T_a = 25^{\circ}C)$

PARAMETER	SYMBOL	Min.	Typ.	Max.	Unit	
DOTCLK Cycle	-		9.0	15.0	MHz	
Hsync Cycle	-		17.14		KHz	
Vsync Cycle	-		60		Hz	
Horizontal Cycle	HCYC		525		CLK	
Horizontal display period	HDP		480	480	CLK	
Horizontal front porch	HFP	2	2		CLK	
Horizontal pulse width	HLW	4	41		CLK	
Horizontal back porch	HBP	8	43		CLK	
Vertical cycle	VCYC		287		H	
Vertical display period	VDP		272		H	
Vertical front porch	VFP	3	4		H	
Vertical pulse width	VLW	1	10		H	
Vertical back porch	VBP		12		H	


Product Specification

4-4. RGB Data Interface Timing Figure

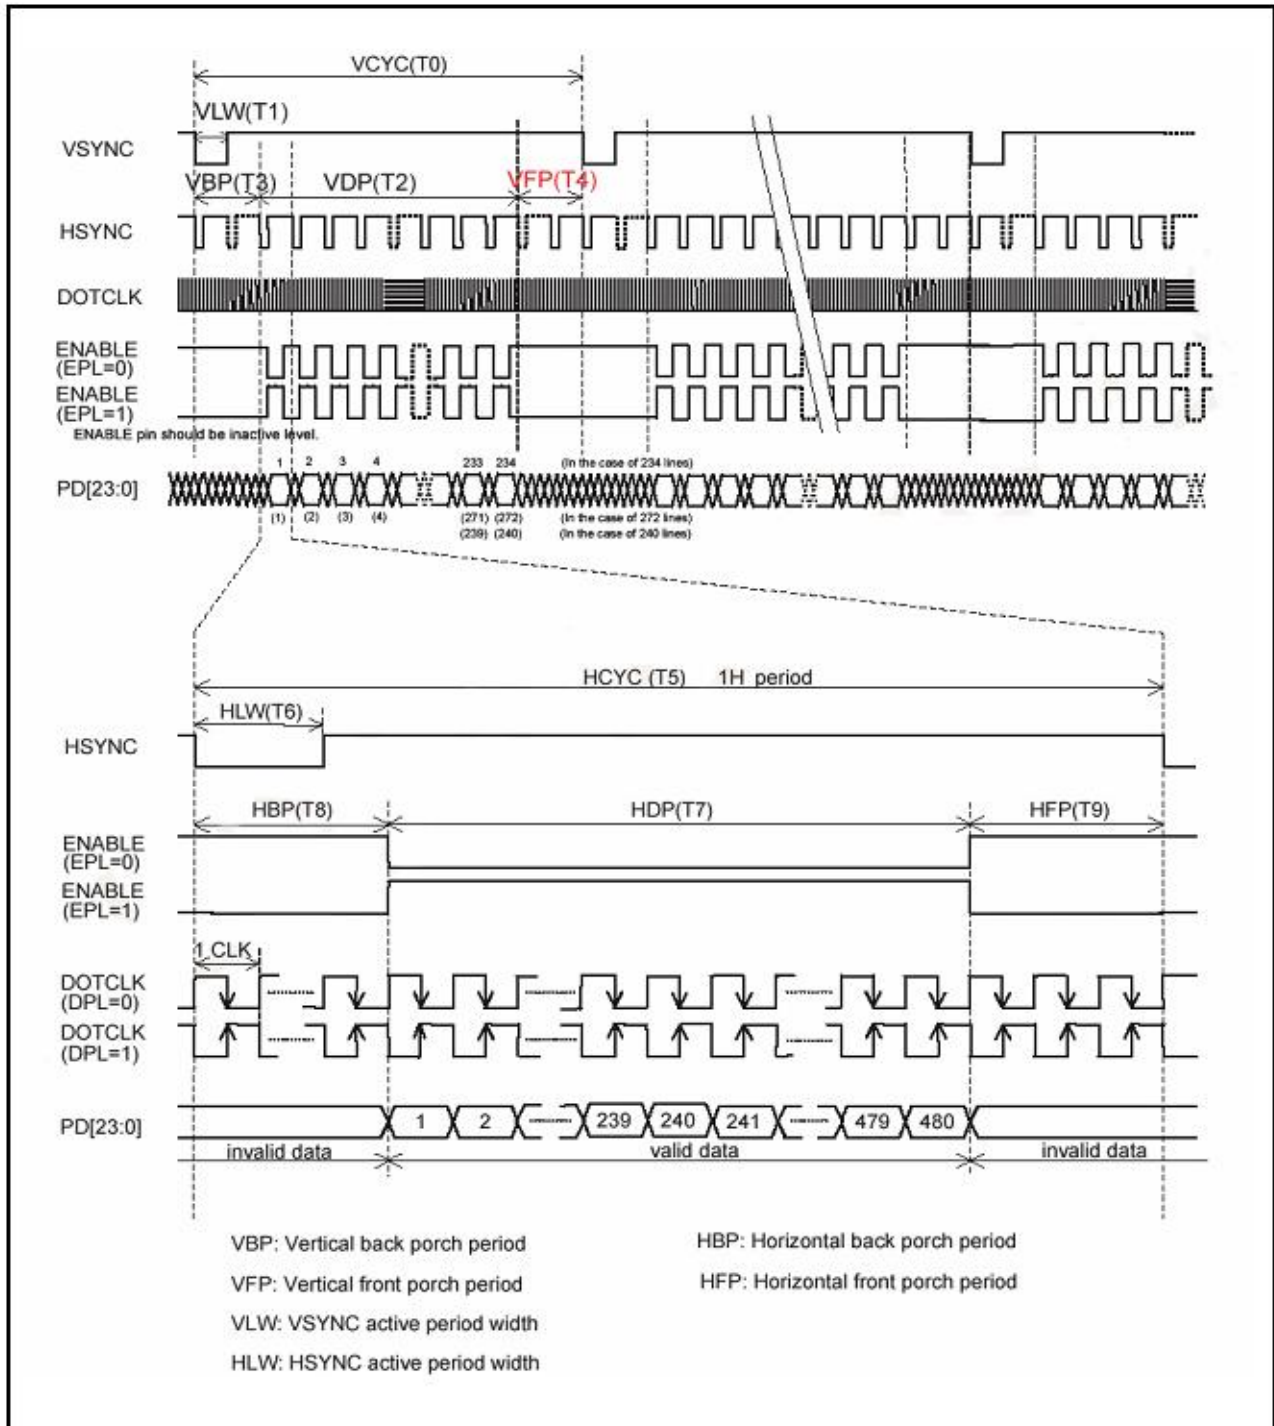


Product Specification
4-5. Clock Synchronized Characteristics

PARAMETER	SYMBOL	Condition	Min.	Typ.	Max.	Unit
Clock Period	t_{CYCD}	CLK	66.7			ns
Clock Pulse High Period	PW_{DH}		25			ns
Clock Pulse Low Period	PW_{DL}		25			ns
Hsync Setup Time	T_{SYNCS}	HSYNC	10			ns
Data Setup Time	T_{PDS}	D00 ~ D27	10			ns
Data Hold Time	T_{PDH}		10			ns
DE Setup Time	T_{ENS}	DE	10			ns
DE Hold Time	T_{ENH}		10			ns
Vsync Setup Time	T_{SYNCS}	VSYNC	10			ns
Clock, Vsync, Hsync Rise/fall Time	T_{rgrb}, T_{rgbf}				5	

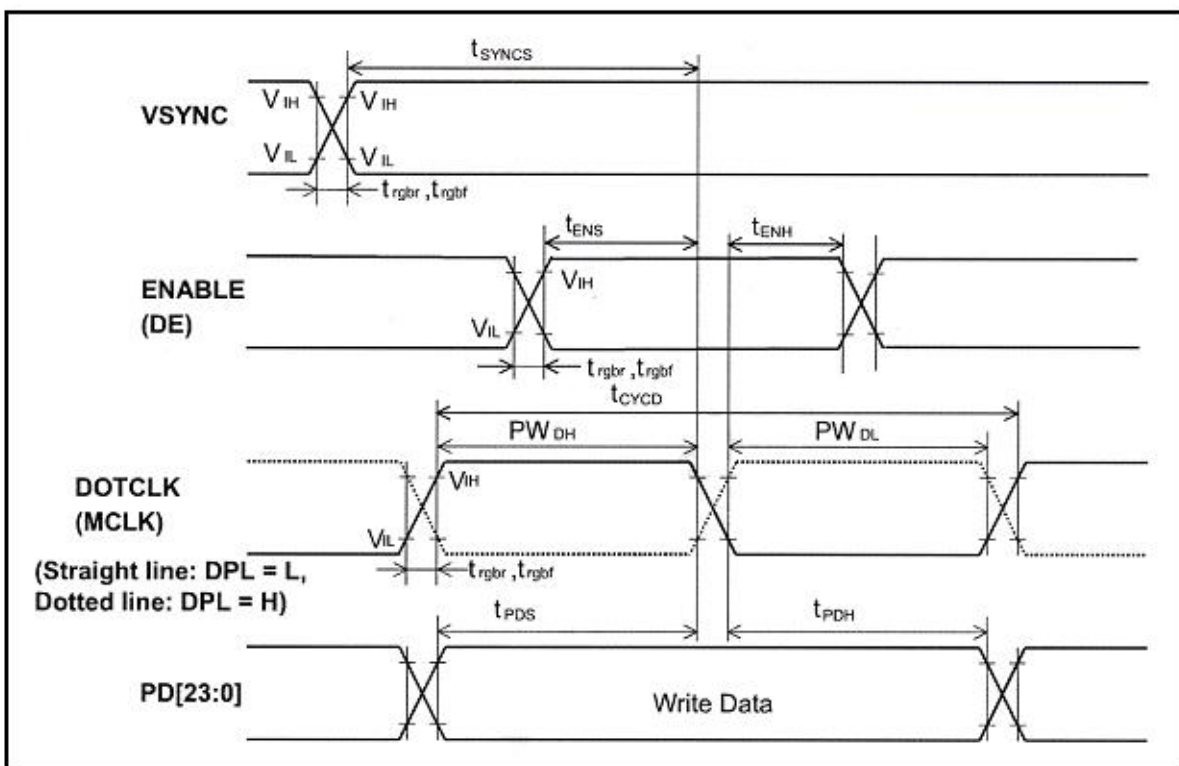

Product Specification

4-6. Power On/Off Sequence

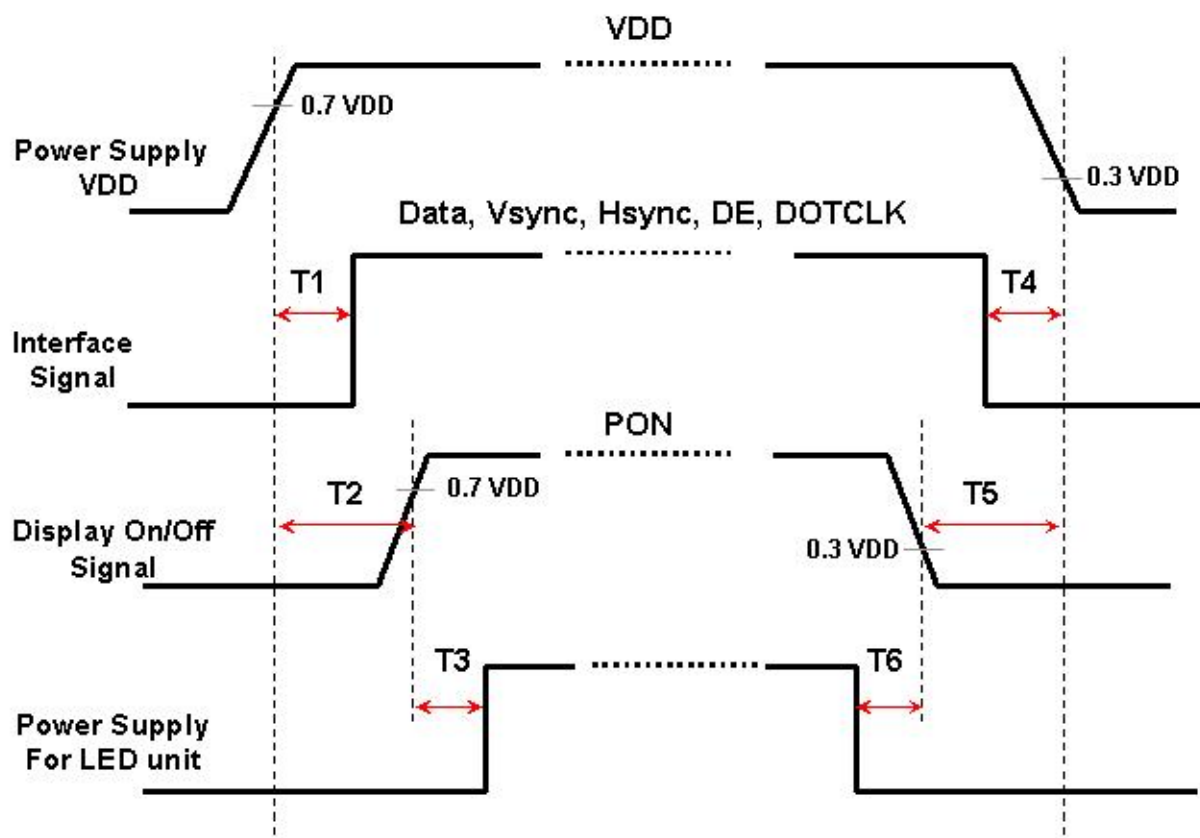

SYMBOL	Min.	Typ.	Max.	Unit
T1	0		10	ms
T2	10		50	ms
T3	0		10	ms
T4	10		50	ms
T5	50		-	ms
T6	10		50	ms

Product Specification

5. Optical Characteristics


5-1. TFT LCD Module

 $(T_a = 25^{\circ}C)$

PARAMETER		SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	REMARK
Luminance		Y	$I_{BL}=20mA$		350		cd/m ²	With TSP
Contrast Ratio		CR	Optimal	200	400	-	-	[Note5-2]
Viewing Angle	Hor.	θ_L	CR > 10	-	65	-	Degrees	[Note5-2] [Note5-3] PR-880
		θ_R		-	65	-		
	Ver.	θ_U		-	50	-		
		θ_D		-	60	-		
Response Time	Rising	$T_r + T_f$	$\theta = 0^{\circ}$	-	25	35	msec	[Note5-4] PR-880
	Falling							
White Color Chromaticity		Wx	Center	TBD	TBD	TBD	-	[Note5-1] PR-650
		Wy	Center	TBD	TBD	TBD		
		Rx	Center	TBD	TBD	TBD		
		Ry	Center	TBD	TBD	TBD		
		Gx	Center	TBD	TBD	TBD		
		Gy	Center	TBD	TBD	TBD		
		Bx	Center	TBD	TBD	TBD		
		By	Center	TBD	TBD	TBD		
Luminance Uniformity		U	$I_{BL}=20mA$	-	1.30	1.40	-	[Note5-5]

- Measurement condition : Refer to the below "Test Equipment Set Up" and next page.

[Test Equipment Set Up]

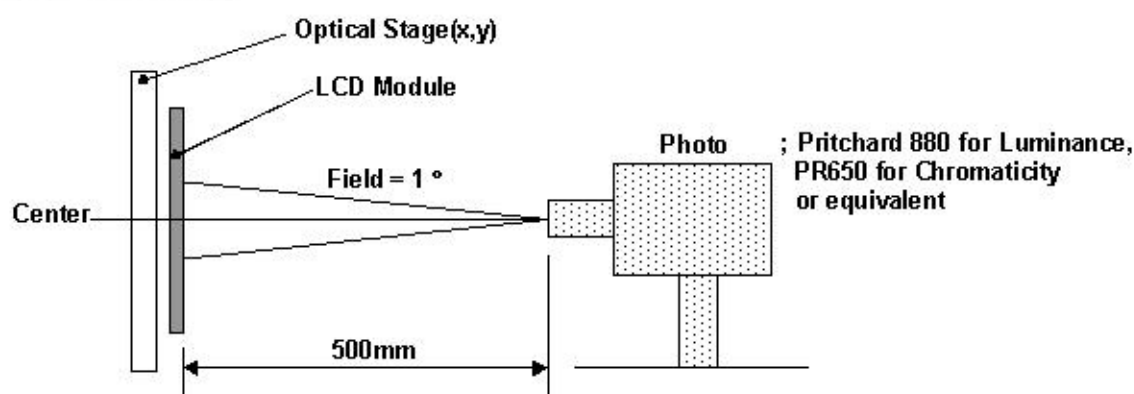

- Measuring Condition ;
 - Measuring surroundings : Dark Room
 - Measuring temperature : $T_a=25^{\circ}C$
 - Adjust operating voltage to get optimum contrast at the center of the display.
 - Measured value at the center point of LCD panel after more than 30 minutes while backlight turning on.

Product Specification

[Note 5-1]

Measured on the center area of the panel by PHOTO RESEARCH photometer PR-880&PR650 or Equivalent


[Note 5-2]

Contrast ratio is defined as follows ;

$$\text{Contrast Ratio(CR)} = \frac{\text{Photo detector output with LCD being "white"}}{\text{Photo detector output with LCD being "black"}}$$

[Note 5-3]


Viewing angle range is defined as follows [PR-880];

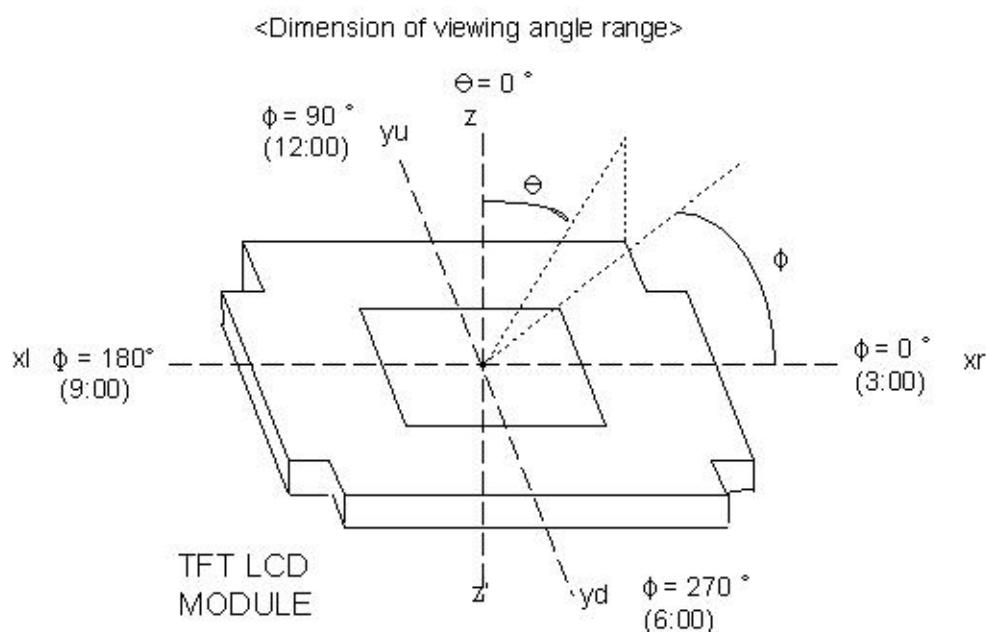

Product Specification

[Note 5-4]


Response time is obtained by measuring the transition time of photo detector output, when input signals are applied so as to make the area "black" to and from "white".

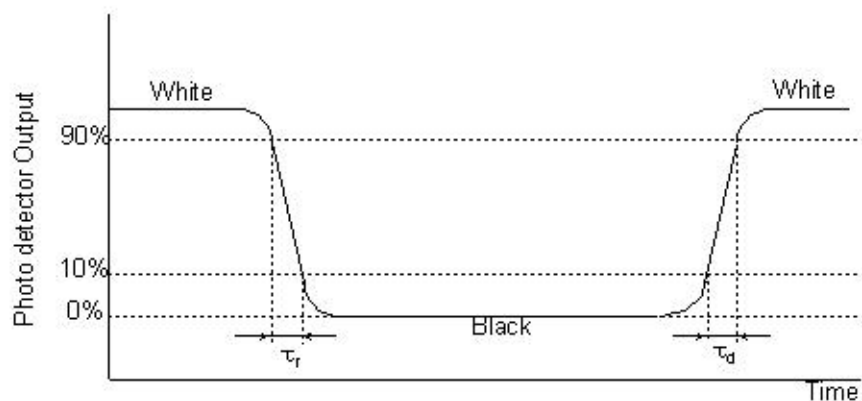

[Note 5-5]

Luminance Uniformity = Maximum of 9points (①~⑨) / Minimum of 9points (①~⑨)

Luminance Uniformity(%) = Minimum of 9points (①~⑨) / Maximum of 9points (①~⑨) x 100

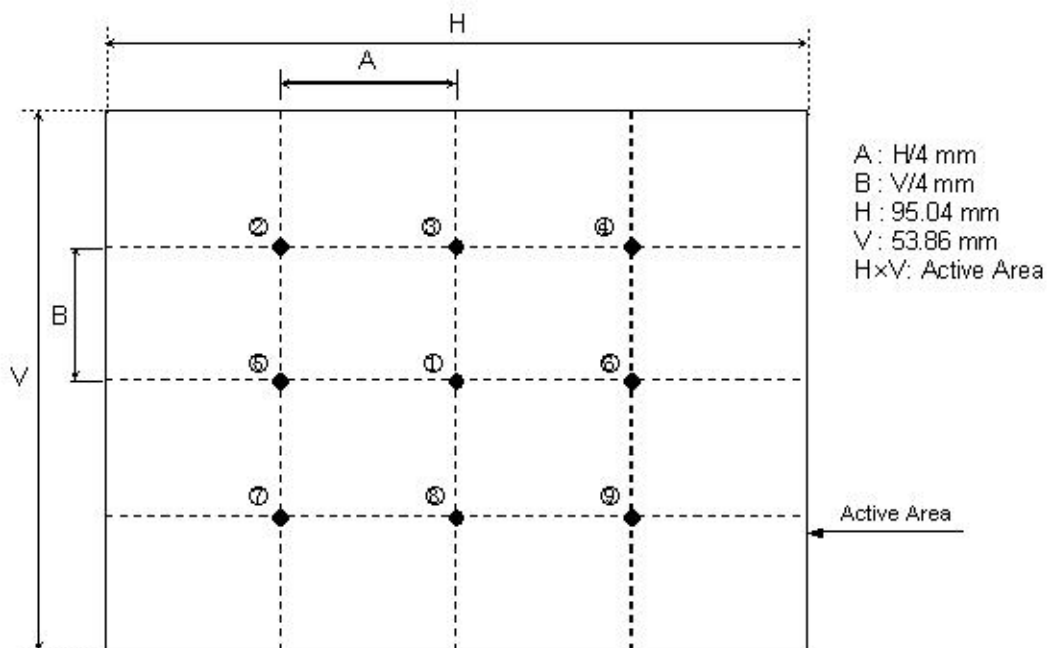

Product Specification
6. Mechanical Characteristics

Parameter	Specification		Unit	Notes
Outline Dimension	Horizontal	105.5(± 0.2)	mm	
	Vertical	67.2(± 0.2)	mm	
	Depth	4.0 ± (0.2)	mm	With TSP
Active Display Area	Horizontal	95.04	mm	
	Vertical	53.856	mm	
Weight	70		g	
Surface Treatment	Anti-Glare Treatment		-	

Product Specification

7. Color Input Data Reference

Colors & Gray Scale	Gray Scale Levels	Data Signal																											
		RED								GREEN								BLUE											
		R0	R1	R2	R3	R4	R5	R6	R7	G0	G1	G2	G3	G4	G5	G6	G7	B0	B1	B2	B3	B4	B5	B6	B7				
Black	--	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Blue	--	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	
Green	--	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	
Cyan	--	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Red	--	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Magenta	--	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	
Yellow	--	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	
White	--	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Black	R0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Darker	R1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	R2	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
Brighter		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	R253	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	R254	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Red	R255	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Black	G0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Darker	G1	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	G2	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
Brighter		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
	G253	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0		
	G254	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0		
Green	G255	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0		
Black	B0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Darker	B1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0		
	B2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0		
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
Brighter		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
	B253	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	1	1		
	B254	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1		
Blue	B255	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1		

Product Specification

8. Reliability Test

8-1. TFT LCD Module

NO	TEST ITEMS	CONDITION	REMARK
1	High Temperature Storage Test	Ta = 80°C 240h	-
2	Low Temperature Storage Test	Ta = -30°C 240h	-
3	High Temperature Operation Test	Ta = 70°C 240h	-
4	Low Temperature Operation Test	Ta = -20°C 240h	-
5	High Temperature and High Humidity Operation Test	Ta = 60°C 90%RH 240h	-
6	Shock Test (operating)	Half Sine wave: 180G 2ms $\pm X$, $\pm Y$, $\pm Z$ Total 6 face. Test Drop: each direction 1 Drop	-
7	Vibration Test (operating)	Random 10Hz, 0.0035G $\sqrt{\text{Hz}}$ $\leftrightarrow$ 300Hz, 0.0035G $\sqrt{\text{Hz}}$ X/Y/Z 30min Total 1.0G	-
8	Thermal Shock Test	-30°C(0.5h) ~ 80°C(0.5h) / 100 cycles	-

[Note]

T_a = Ambient Temperature

In the standard condition, there shall be no practical problems that may affect the display function.

Result Evaluation Criteria

TFT-LCD panel should be at room temperature for 24 hours when the display quality test is over.
There should be no particular change which might affect the practical display function.

Product Specification
8-2. Touch Screen Panel

PARAMETER	MIN.	TYP.	MAX.	UNIT	REMARK
Activation force	-	-	100	g	R0.8mm polyacetal Pen or Finger
Durability (Surface scratching)	Write 100,000			Characters	[Note]
Durability (Surface pitting)	1,000,000			Touches	[Note]
Surface hardness	3	-	-	H	Judgment ref.JIS-K5600


[Note]

- (1) Measurement for Surface area
 - Force : 250gf
 - Speed : 60m/sec
 - Stylus : R0.8 polyacetal tip
- (2) Pit 1,000,000 times on the Film with a R0.8 silicon rubber
 - Force : 250gf
 - Speed : 2times/sec


Product Specification

9. Outline Dimension

9-1. Front View

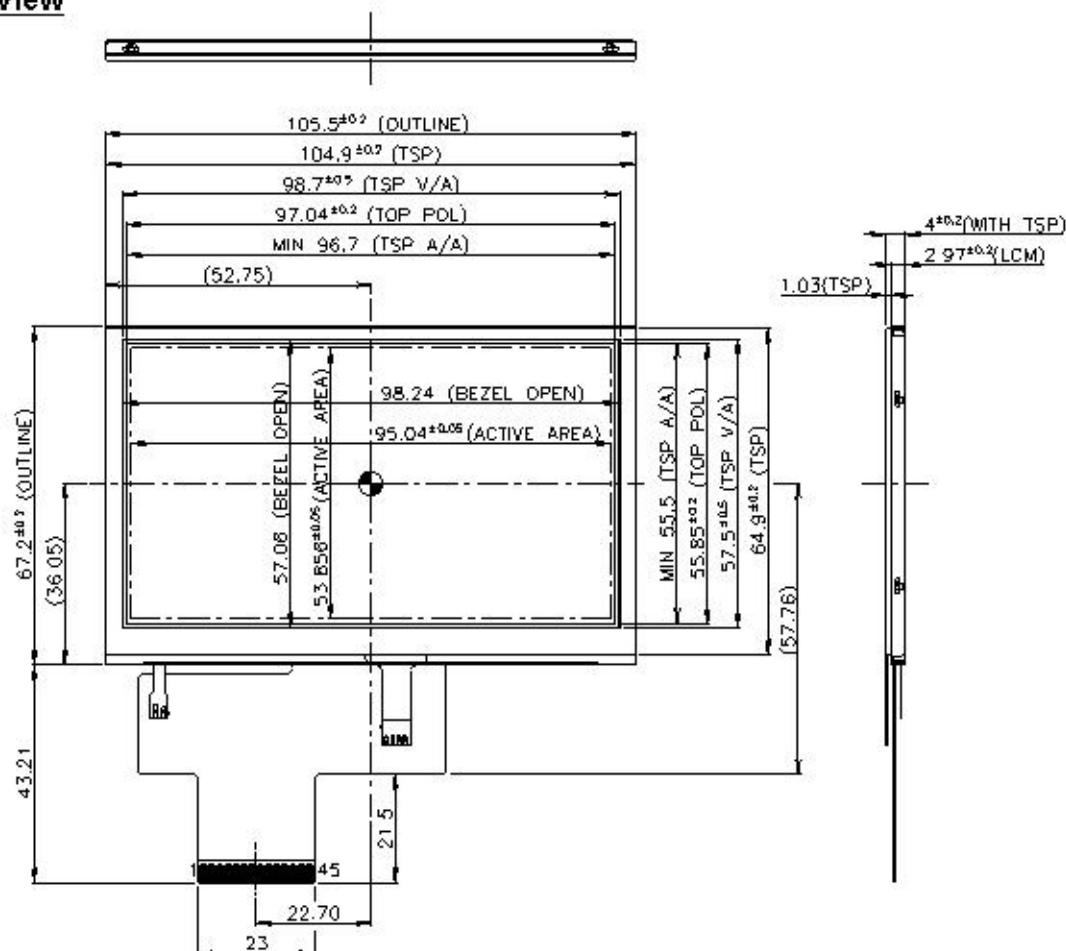

9-2. Rear View

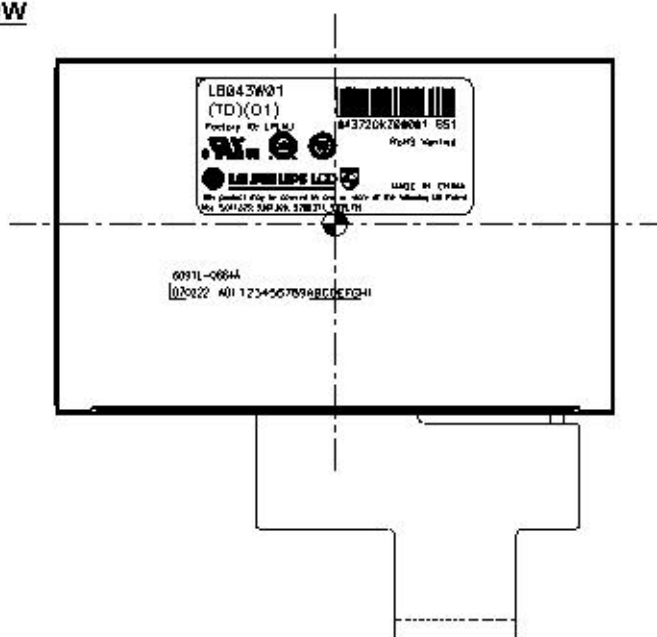

Product Specification

10. Packing

10-1. Designation of Lot Mark

a) Lot Mark

A	B	C	D	E	F	G	H	I	J	K	L	M
---	---	---	---	---	---	---	---	---	---	---	---	---

A,B,C : SIZE(INCH)

E : MONTH

D : YEAR

F ~ M : SERIAL NO.

Note

1. YEAR

Year	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010
Mark	1	2	3	4	5	6	7	8	9	0

2. MONTH

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Mark	1	2	3	4	5	6	7	8	9	A	B	C

b) Location of Lot Mark

Serial NO. is printed on the label. The label is attached to the front side of assembly.
 This is subject to change without prior notice.

10-2. Packing Form

- a) Package quantity in one box : 63 pcs
- b) Box Size : 475x348x175 (mm)

Product Specification

11. Precautions

Please pay attention to the following when you use this TFT LCD module.

11-1. Mounting Precautions

- (1) You should consider the mounting structure so that uneven force(ex. Twisted stress) is not applied to the module.
And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- (2) Please attach a transparent protective plate to the surface in order to protect the polarizer.
Transparent protective plate should have sufficient strength in order to resist external force.
- (3) You should adopt radiation structure to satisfy the temperature specification.
- (4) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- (5) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment.
Do not touch the surface of polarizer for bare hand or greasy cloth.(Some cosmetics deteriorate the polarizer.)
- (6) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaked with petroleum benzine. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
- (7) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (8) The metal case of a module should be contacted to electrical ground of your system.

11-2. Operating Precautions

- (1) The spike noise causes the mis-operation of circuits. It should be lower than following voltage :
 $V = \pm 200\text{mV}$ (Over and under shoot voltage)
- (2) Response time depends on the temperature.(In lower temperature, it becomes longer.)
- (3) Brightness depends on the temperature.(In lower temperature, it becomes lower.)
And in lower temperature, response time(required time that brightness is stable after turned on) becomes longer.
- (4) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (5) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- (6) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.

Product Specification

11-3. Electrostatic Discharge Control

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.

11-4. Precautions for Strong Light Exposure

Strong light exposure causes degradation of polarizer and color filter.

11-5. Storage

When storing modules as spares for a long time, the following precautions are necessary.

- (1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
- (2) The polarizer surface should not come in contact with any other object.
It is recommended that they be stored in the container in which they were shipped.

11-6. Handling Precautions for Protection Film

- (1) When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- (2) The protection film is attached to the polarizer with a small amount of glue. If some stress is applied to rub the protection film against the polarizer during the time you peel off the film, the glue is apt to remain on the polarizer.
Please carefully peel off the protection film without rubbing it against the polarizer.
- (3) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the polarizer after the protection film is peeled off.
- (4) You can remove the glue easily. When the glue remains on the polarizer surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.