

Standard Belt Size

GB Type
(D)S3M
Type

U Type
S3M
Type

Belt Names

100

Nominal Belt Width
(mm)×10

(D)S3M

Belt Type
(DS3M for Double Timing Belt)


459

Belt Nominal Length (mm)


GB-(U)

GB Type, U Type

GB Type

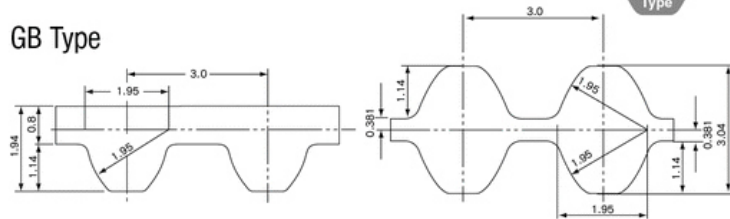

U Type

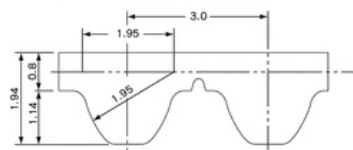

Standard Belt Width

Nominal Belt Width	Belt Width (mm)
60	6
100	10
150	15

Standard belt size table

Belt Nominal Length	Number of teeth of a gear	Belt Pitch Circumference (mm)	Availability	
			G	U
S3M 96	32	96	○	—
S3M 102	34	102	○	—
S3M 114	38	114	○	—
S3M 117	39	117	○	—
S3M 120	40	120	○	—
S3M 123	41	123	○	—
S3M 129	43	129	○	—
S3M 132	44	132	○	—
S3M 135	45	135	○	—
S3M 141	47	141	○	○
S3M 144	48	144	○	○
S3M 147	49	147	○	—
S3M 150	50	150	○	—
S3M 156	52	156	○	—
S3M 159	53	159	○	—
S3M 162	54	162	○	○
S3M 168	56	168	○	—
S3M 171	57	171	○	—
S3M 174	58	174	○	○
S3M 177	59	177	○	○
S3M 180	60	180	○	○
S3M 183	61	183	○	—
S3M 186	62	186	○	○
S3M 189	63	189	○	○
S3M 192	64	192	○	○
S3M 195	65	195	○	○
S3M 198	66	198	○	—
S3M 201	67	201	○	○
S3M 204	68	204	○	—
S3M 207	69	207	○	—
S3M 210	70	210	○	○
S3M 213	71	213	○	○
S3M 216	72	216	○	—
S3M 219	73	219	○	○
S3M 222	74	222	○	—
S3M 225	75	225	○	○
S3M 228	76	228	○	—
S3M 231	77	231	○	—
S3M 234	78	234	○	—
S3M 237	79	237	○	—
S3M 246	82	246	○	○
S3M 249	83	249	—	○
S3M 252	84	252	○	○
S3M 255	85	255	○	○
S3M 258	86	258	○	—
S3M 261	87	261	○	—
S3M 264	88	264	○	○
S3M 267	89	267	○	—

Standard belt size table

Belt Nominal Length	Number of teeth of a gear	Belt Pitch Circumference (mm)	Availability	
			G	U
S3M 270	90	270	○	—
S3M 273	91	273	○	—
S3M 276	92	276	○	○
S3M 279	93	279	○	—
S3M 282	94	282	○	—
S3M 285	95	285	○	—
S3M 288	96	288	○	○
S3M 291	97	291	○	—
(D) S3M 300	100	300	○	○
(D) S3M 303	101	303	○	—
(D) S3M 306	102	306	○	—
(D) S3M 309	103	309	○	—
(D) S3M 312	104	312	○	○
(D) S3M 315	105	315	○	—
(D) S3M 318	106	318	○	○
S3M 324	108	324	○	—
(D) S3M 327	109	327	○	○
(D) S3M 330	110	330	○	—
(D) S3M 333	111	333	○	—
(D) S3M 339	113	339	○	—
(D) S3M 342	114	342	○	—
(D) S3M 345	115	345	○	○
S3M 348	116	348	○	—
(D) S3M 351	117	351	○	—
(D) S3M 354	118	354	○	—
S3M 360	120	360	○	○
S3M 363	121	363	○	○
(D) S3M 366	122	366	○	—
(D) S3M 369	123	369	○	○
(D) S3M 372	124	372	○	—
(D) S3M 375	125	375	○	○
S3M 378	126	378	—	○
(D) S3M 384	128	384	○	—
(D) S3M 387	129	387	○	○
(D) S3M 396	132	396	○	○
(D) S3M 399	133	399	○	—
S3M 402	134	402	○	○
(D) S3M 405	135	405	○	○
(D) S3M 408	136	408	○	○
(D) S3M 414	138	414	○	—
(D) S3M 417	139	417	○	—
(D) S3M 420	140	420	○	○
S3M 423	141	423	○	—
(D) S3M 426	142	426	○	—
(D) S3M 432	144	432	○	○
(D) S3M 435	145	435	○	—
(D) S3M 444	148	444	○	—
(D) S3M 447	149	447	○	—

● (D) is the standard size of Double timing belt G.

Design process and transmission capacity of the Double timing belt is the same as the standard belt with teeth on one side.

● There are non-stocked sizes in the standard sizes. Please check stock availability when you place an order.