


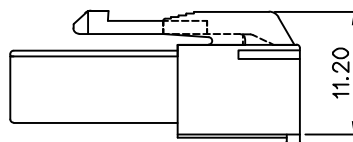
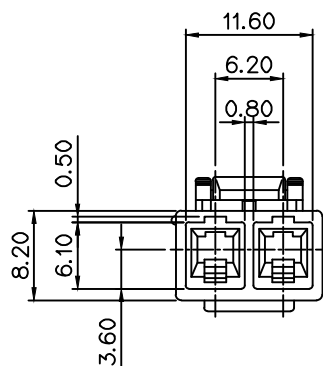


| GENERAL TOLERANCE (HOUSING) |       |       |       |        | USED ON |
|-----------------------------|-------|-------|-------|--------|---------|
| 10MAX                       | 20MAX | 45MAX | ANGLE | ECCENT |         |
| ±0.2                        | ±0.25 | ±0.3  | ±30'  | 0.1    |         |

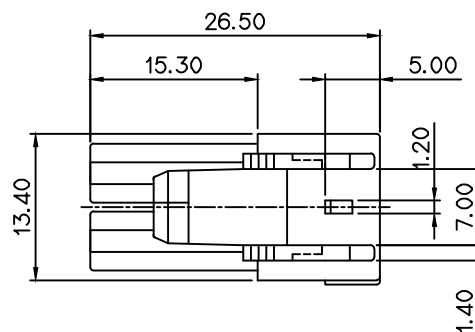

주 기

1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 
- 2.적용 TERMINAL : ST730638, 639, 641, 681
- 
- 3.적용 HOUSING : MG620874
- 
- 4.적용 REAR HOLDER : MG630875
- 
- 5.제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬  
PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한  
최대 허용농도를 초과해서는 안 된다.

NOTE

1. MUST BE FREE OF FLASH, SINK  
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730638, 639, 641, 681
3. APPLICABLE HOUSING : MG620874
4. APPLICABLE REAR HOLDER : MG630875
5. 6HAZARDOUS SUBSTANCES IN PARTS (Lead,  
Mercury, Cadmium, Hexavalent Chromium, PBBs,  
PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE  
CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE  
& RoHS REGULATION

ISSUE MARK

|                 |  |                 |  |          |      |            |                  |                                                                                                                                             |              |          |             |
|-----------------|--|-----------------|--|----------|------|------------|------------------|---------------------------------------------------------------------------------------------------------------------------------------------|--------------|----------|-------------|
|                 |  |                 |  | MATERIAL |      | PBT(V0)    |                  |  KOREA ELECTRIC<br><u>ENGINEERED</u> TERMINAL CO., LTD |              |          |             |
|                 |  |                 |  | FINISH   |      | NATLURAL   |                  |                                                                                                                                             |              |          |             |
|                 |  |                 |  |          |      | WIRE RANGE |                  | AWG(#22~#12)                                                                                                                                |              | CLASS    |             |
|                 |  |                 |  |          |      | INSULATION |                  |                                                                                                                                             |              | TYPE     |             |
| LTR             |  | REVISION RECORD |  | DR.      | CHK. | APP.       | DATE             | TOLERANCE<br>EXCEPT<br>AS NOTED                                                                                                             | SCALE<br>2/1 | PART NO. | △MG 610873P |
| DR. KO 95.07.03 |  |                 |  | CHK.     | Sik  | 95.07.03   | PART NAME        |                                                                                                                                             |              |          |             |
| CHK.            |  |                 |  | APP.     | S. w | 7/18       | EDL-2P PLUG HS'G |                                                                                                                                             |              |          |             |